K-XIN NEW
康 新 工 具



K-XIN NEW
康 新 工 具

座机/TEL：0086-571-82702188
传真/FAX：0086-571-82702166
地址： 杭州萧山蜀山街道桥头陈村康新工业园
ADD:Kangxin Industrial Park, Chencun, Qiaotou, Shushan Street, Xiaoshan, Hangzhou, China

网址： www.sawchains.net
www.kxtsawchain.com
邮箱： sales@kxtsawchain.com
public@kxtsawchain.com

康新工具
KANGXIN TOOLS

Chain saw Saw chains
Chain saw Guide bars







关于我们
ABOUT
CONTENTS

以诚待人 以信立企

由我们来满足您现在的需要，让我们来帮助您实现您潜在的需要

Please let us meet your now demand, and also let us meet you future demand.
"Zero Defect" We will pursue forever.

COMPANY
INTRODUCE

杭州康新工具制造有限公司，位于风景秀丽的杭州钱塘江畔，距杭州萧山国际机场仅30公里，交通十分便利。公司所在园区占地33000平方米，用有标准厂房20000平方米。主营产品为链板和锯链，拥有链板智能化激光切割，高效自动焊接，锯链等温淬火网带炉，自动磨刀，自动铆接装配等关键设备和规范完整的检测设备。年产链板500万片，锯链300万条。公司内外销年产值超亿，是目前国内板链生产规模较大的厂家。

公司已全面通过1S09001质量体系认证，拥有自营进出口权，本着由我们来满足您现在的需要，让我们来帮助您实现您潜在的需要的宗旨和使命，全力为广大客户提供优良产品和优质服务。愿与各合作者携手共进，共谋发展，共创行业新的辉煌。

HANGZHOU KANGXIN TOOLS MANUFACTURE CO.. LTD LOCATED BY THE SCENIC HANGZHOU QIANTANG RIVER , IS CONVENIENTLY LOCATED ONLY 30 KILOMETRES FROM HANGZHOU XIAOSHAN INTERNATIONAL AIRPORT , OUR KEY PRODUCTS ARE GUIDE BARS AND SAW CHAINS, AND ARE MANUFACTURED IN A MODERN AND TECHNICALLY ADVANCED FACTORY THAT USES STATE OF THE ART EQUIPMENT INCLUDING AUTOMATIC WELDING , FULLY COMPUTERISED AUTOMATIC ASSEMBLY , WITH A PRECISE TESTING LABORATORY TO ENSURE ABSOLUTE QUALITY. OUR CAPACITY HAS GROWN TO PRODUCING 5, 000, 000 GUIDE BARS AND 120 , 000 ROLLS OF SAW CHAINS PER YEAR , AND OUR TURNOVER NOW EXCEEDS RMB 100 , 000 , 000 PER YEAR , AND IS THE LARGEST COMPANY IN CHINA FOR OUR INDUSTRY.

WE ARE ISO 9001 CERTIFIED,ALSO OBTAINED CE CERTIFICATE, AND ARE AN EXPORT ORINTATED COMPANY THAT DELIVERS CONSISTENT QUALITY , COMMITTED SERVICE AND GREAT SUPPLY , AND WE LOOK FORWARD TO WORKING WITH YOU AND MEETING ALL 0F YOUR REQUIREMENTS , DEMANDS AND QUALITY.WE PROMISE THAT YOU WILL BE VERY SATISFIED.

KANGXIN

INTRODUCE

DEVICE

display

HANGZHOU KANGXIN TOOLS MANUFACTURE CO.LTD.



• 自动焊机 automatic welding machine



• 网带炉 automatic heat cheatment



• 自动冲床 automatic punching machine



• 导板仓库 bar warehouse

随着经济时代的到来，我们深知科技的重要性，市场的竞争很大程度上取决于设备的竞争。为此，我们不仅注重新材料、新工艺、新技 术的引进和推广应用，更加注重高科技设备的引进。每年我们都投入了大量的资金用于设备的更新，利用先进的设备提高效率，降低成本增强市场争力。最大程度让客户成为价格真正的决策者。

With the advent of economic times, we know the importance of science and technology , competition in the market depends largely on the equipment, for which we not only focus on new materials, new work arts, the imported of new technologies and promote the use, we even pay more attention to update the equipment. We have invested considerable funds to update equipments each year , use the advanced equipment improve efficiency , reduce costs and improve market competit iveness. To allow the customers to become the real decision maker of price.



• 自动装配机 automatic



• 磨刀机 Grinding machine





链条 / SAW CHAIN



链条规格种类



		.043	.050	.058	.063	.080
1/4" E		✓	✓			
3/8" A		✓	✓			
.325" B			✓	✓	✓	
3/8" C			✓	✓	✓	
.404" D					✓	✓

PITCH	GAUGE	CHAIN TYPE
ALP=3/8"LP	43=.043"	SQ=FULL CHISEL（直角）
B=.325"	50=.050"	空白=SEMI CHISEL（半圆角）
A=3/8"	58=.058"	S=SAFTY（防反弹/安全传动）
C=.404"	63=.063"	
D=1/4"	80=.080"	

例如：B - 58S - SQ　代表325 - .058带安全传动直角链条

K-XIN 康新　实力工厂 自主品牌　ISO 9001　CE　德国EPR认证

Pitch	Item NO.		File Size	Angel	Depth-Gauge
÷2	KXT	FOR OREGON			
1/4"	D-50	25A	4.0mm 5/32"	30°	0.65mm(.025")
3/8LP	ALP-43	90S	4.0mm 5/32"	30°	0.65mm(.025")
	ALP-50	91VXL	4.0mm 5/32"	30°	0.65mm(.025")
	ALP-50S	91PX	4.0mm 5/32"	30°	0.65mm(.025")
	ALP-50-SQ ALP-50S-SQ		4.0mm 5/32"	30°	0.65mm(.025")
.325"	B-50 B-50S	20BPX	4.8mm 3/16"	30°	0.65mm(.025")
	B-50-SQ B-50S-SQ	20LPX	4.8mm 3/16"	30°	0.65mm(.025")
	B-58 B-58S	21BPX	4.8mm 3/16"	30°	0.65mm(.025")
	B-58-SQ B-58S-SQ	21LPX	4.8mm 3/16"	30°	0.65mm(.025")
	B-63 B-63S	22BPX	4.8mm 3/16"	30°	0.65mm(.025")
	B-63-SQ B-63S-SQ	22LPX	4.8mm 3/16"	30°	0.65mm(.025")
3/8"	A-50 A-50S	72DG 72DP	5.5mm 7/32"	30°	0.65mm(.025")
	A-50-SQ A-50S-SQ	72LG 72LP	5.5mm 7/32"	30°	0.65mm(.025")
	A-58 A-58S	73DG 73DP	5.5mm 7/32"	30°	0.65mm(.025")
	A-58-SQ A-58S-SQ	73LG 73LP	5.5mm 7/32"	30°	0.65mm(.025")
	A-63 A-63S	75DG 75DP	5.5mm 7/32"	30°	0.65mm(.025")
	A-63-SQ A-63S-SQ	75LG 75LP	5.5mm 7/32"	30°	0.65mm(.025")
.404"	D-63	27X	5.5mm 7/32"	30°	0.75mm(.030")
	D-63-SQ	59LX	5.5mm 7/32"	30°	0.75mm(.030")
	D-80	18HX	5.5mm 7/32"	30°	0.75mm(.030")

杭州康新工具制造有限公司


浙江省杭州市萧山蜀山街道康新工业园

拉力测试试验报告

1.试验链条：康新　　2.测试日期：2022-09-08,17:57

3.链条型号：0.325"0.058"　　4.测试速度：50.000mm/min

最大力 (KN)	试验时间 (min)	滤波系数	减速系数
8.1	0.06.55	5	20

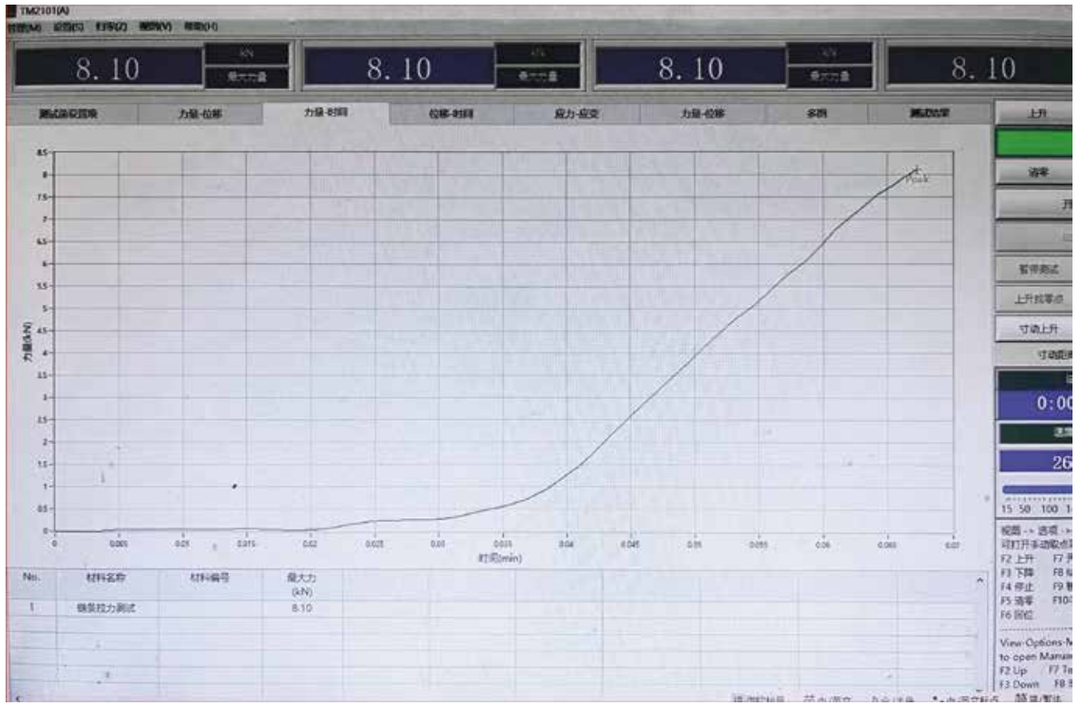

测试结果



Hangzhou Kangxin Tools Manufacture Co., Ltd


Kangxin industry, Shushan street, Xiaoshan District,Hangzhou,Zhejiang, China

Tensile/ Pressure Testing Report


1:The chain for testing: Kangxin　　2:Date:2022-09-08 17:57

3: Chain model:0.325"0.058"　　4:Testing speed:50.000mm/min

Max Force (KN)	Time (min)	Filter coefficient	Deceleration coefficient
8.1	0.06.55	5	20

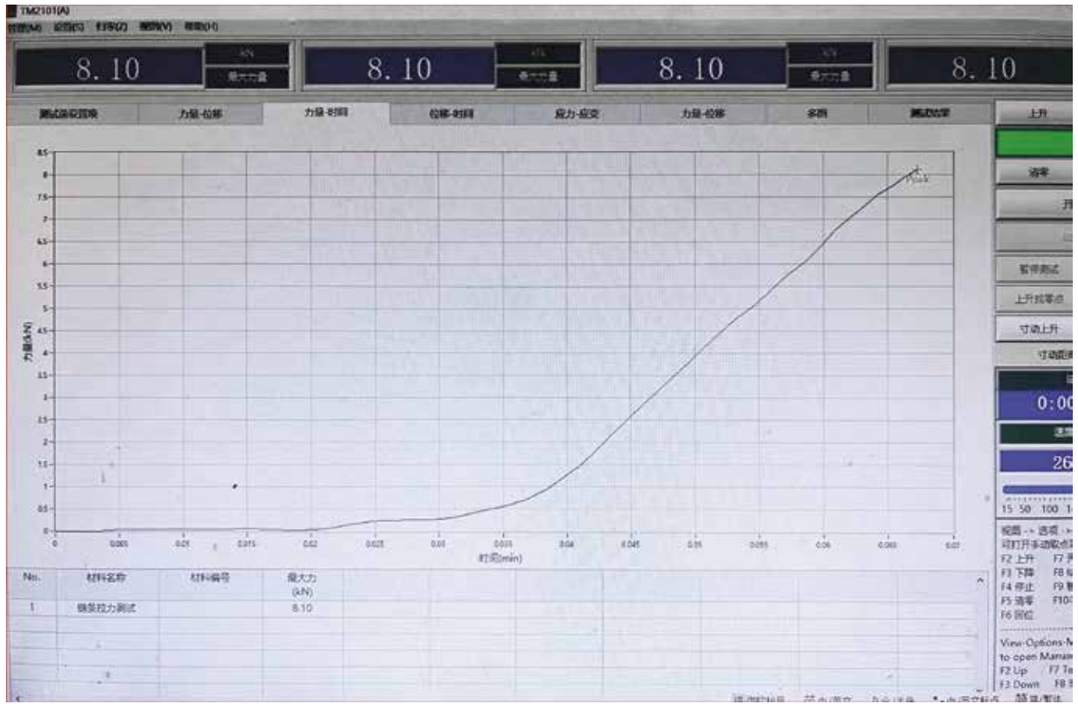

Test result

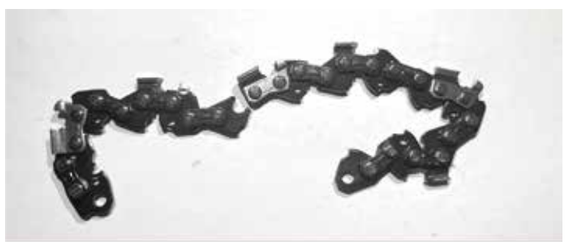

杭州康新工具制造有限公司

浙江省杭州市萧山蜀山街道康新工业园

拉力测试试验报告

1.试验链条：OREGON　　2.测试日期：2022-09-08,17:57

3.链条型号：0.325"0.058"　　4.测试速度：50.000mm/min

最大力 (KN)	试验时间 (min)	滤波系数	减速系数
8.07	0.09.27	5	20



测试结果



Hangzhou Kangxin Tools Manufacture Co., Ltd

Kangxin industry, Shushan street, Xiaoshan District,Hangzhou,Zhejiang, China

Tensile/ Pressure Testing Report

1:The chain for testing: OREGON　　2:Date:2022-09-08 17:58

3: Chain model:0.325"0.058"　　4:Testing speed:50.000mm/min

Max Force (KN)	Time (min)	Filter coefficient	Deceleration coefficient
8.07	0.09.27	5	20



Test result



3/8"-PITCH CHAINS FOR PROFESSIONAL USE

Use



Kickback Reducing Features



Cutter Type



End View





- Intended for a limited group of professional and commercial users such as arborists, utiluty/construction workers or landscapers.
- cutters have an angular shape with twin cutting corners that offer outstanding performance along with durability and easy forgiving maintenance comparable to round-comered chains.
- chassis design reduces vibration 25% or more at the handles.
- tie straps help keep oil where is's needed-on the chain.
- oil holes help carry oil around the full length of the guied bar's groove.

Chain Part No.	ALP-43	ALP-50
Gauge	.043"	.050"
Oregon	90VG	91VG

Chain saw parts / Guide bars & Chains / Accessories

3/8"-PITCH CHAINS FOR PROFESSIONAL USE

Use



Kickback Reducing Features



Cutter Type



End View





- Intended for a limited group of professional and commercial users such as arborists, utiluty/construc -tion workers or landscapers.
- cutters have an angular shape with twin cutting corners that offer outstanding performance along withdurability and easy forgiving maintenance comparable to round-comered chains.
- chassis design reduces vibration 25% or more at the handles.
- tie straps help keep oil where is's needed-on the chain.
- oil holes help carry oil around the full length of the guied bar's groove.

Chain Part No..	ALP-43S	ALP-50S
Gauge	.043"	.050"
Oregon	90VG	91VG

3/8"-PITCH CHAINS FOR PROFESSIONAL USE

Use



Kickback Reducing Features



Cutter Type



End View





- Top-performing square-corner"chisel "cutters
- Bumper drive links help reduce kickback
- lop-plate witness marks accurate sharpening easier

Chain Part No.	ALP-50S-SQ
Gauge	.050"

Chain saw parts / Guide bars & Chains / Accessories

3/8"-PITCH CHAINS FOR PROFESSIONAL USE

Use



Kickback Reducing Features



Cutter Type



End View





- Round-cornered "semi-chisel "cutters work fast and are more tolerant of sharpening than most cutter types
- Bumper drive links help reduce kickback
- Excellent performance in dusty or dirty conditions
- Tie straps help keep oil where it's needed-on the chain
- Chassis design reduces vibration 25% or more at the handles

Chain Part No.	A-50	A-58	A-63
Gauge	.050"	.058"	.063"
Oregon	72DP	73DP	75DP

3/8"-PITCH CHAINS FOR PROFESSIONAL USE

Use



Kickback Reducing Features



Cutter Type



End View





- Top-performing square-corner"chisel "cutters
- Bumper drive links help reduce kickback
- lop-plate witness marks accurate sharpening easier

Chain Part No.	A-58S-SQ
Gauge	.058"

.325"-PITCH CHAINS FOR PROFESSIONAL USE

Use



Kickback Reducing Features



Cutter Type



End View





- Top-performing square-corner " chisel "cutters
- Bumper drive links help reduce kickback
- lop-plate witness marks accurate sharpening easier

Chain Part No.	B-50S-SQ	B-58S-SQ	B-63S-SQ
Gauge	.050"	.058"	.063"
Oregon	20LP	21LP	22LP

.325"-PITCH CHAINS FOR PROFESSIONAL USE

Use



Kickback Reducing Features



Cutter Type



End View





- Cutters have small-radius working corrers for fast cutting and easy sharpening
- Tie straps help oil where it's needed-on the chain
- Top-plate witness mark makes accurate sharpening easier.

Chain Part No.	B-50S	B-58S	B-63S
Gauge	.050"	.058"	.063"
Oregon	21BP	21BP	22BP

Chain saw parts / Guide bars & Chains / Accessories

.325"-PITCH CHAINS FOR PROFESSIONAL USE

Use



Kickback Reducing Features



Cutter Type



End View





- Cutters have small-radius working corrers for fast cutting and easy sharpening
- Tie straps help oil where it's needed-on the chain
- Top-plate witness mark makes accurate sharpening easier.

Chain Part No.	B-50	B-58	B-63
Gauge	.050"	.058"	.063"

.325"-PITCH CHAINS FOR PROFESSIONAL USE

Use



Kickback Reducing Features



Cutter Type



End View





- Top-performing square-corner"chisel "cutters
- Bumper drive links help reduce kickback
- lop-plate witness marks accurate sharpening easier

Chain Part No.	B-50-SQ	B-58-SQ	B-63-SQ
Gauge	.050"	.058"	.063"

.404"-PITCH CHAINS FOR PROFESSIONAL USE

Use



Kickback Reducing Features



Cutter Type



End View





- Not for hand-held use
- Cutters have small-radius working corners for excellent performance, resistance to wear, and easy sharpening
- Tie straps help keep oil where it's needed-on the chain

Chain Part No.	C-63
Gauge	.063"
Oregon	59L

SPECIALTY CHAINS 1/4"-PITCH

Use



Kickback Reducing Features



Cutter Type



End View





- Cutters have small-radius working corners that cut fast and are easy to sharpen
- Small size and light weight make D easy to use and highly maneuverable

Chain Part No.	D-43	D-50
Gauge	.043"	.050"
Oregon		25AP

导板 / GUIDE BAR





导板型号介绍


INSTRUCTION OF GUIDE BAR’S PART NO.



For Example: BU18-72-5812P

B	U	18	72	58	12	P
						
Pitch	Motor Mount	Called Length	Link	Gauge	Teeth Count	Power Tech
A=3/8" B=.325" C=.404" D=1/4"	E P EX PA F S G U J V L(M) C	18=18"	72	63=.063" 50=.050" 58=.058" 43=.043"	7=7T 10=10T 12=12T 9=9T 11=11T	P T


BAR MOUNT

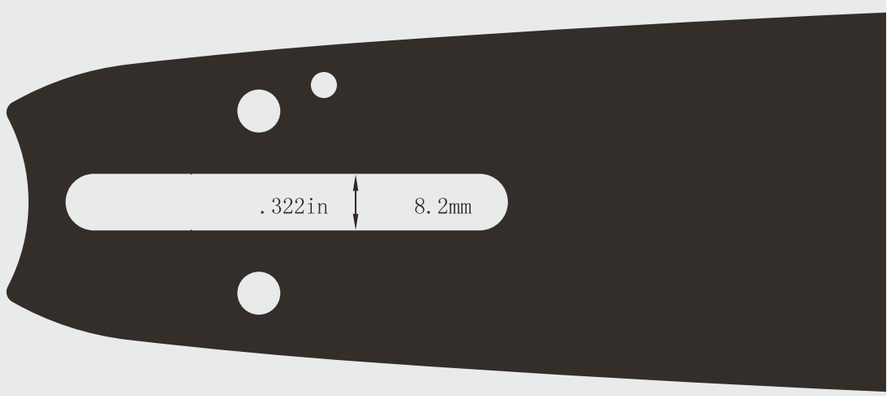

1:1

≡ C

MAKITA

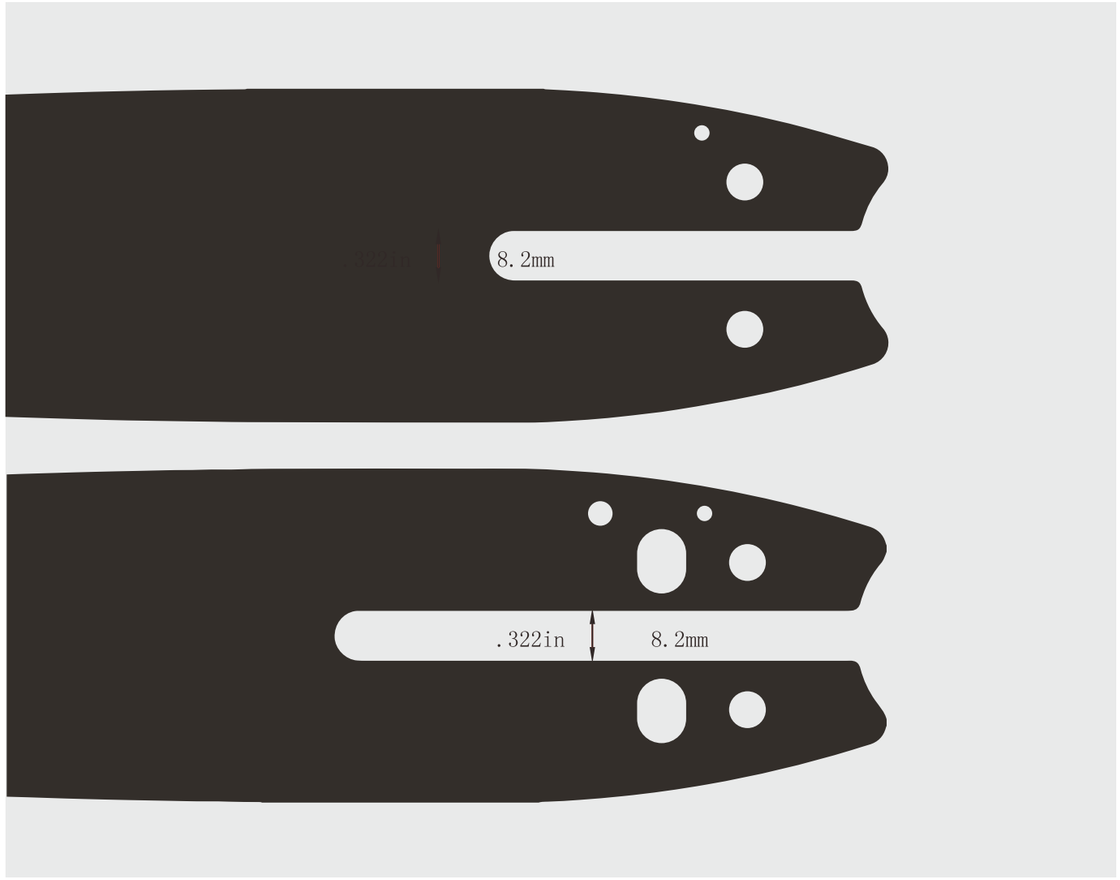


≡ DG (DG-USW)

1:1

ECHO	STIHL
HUSQVARNA	POULAN PRO
SHINDAIWA	DOLMAR
ZENOAH OLEO-MAC TANAKA	


BAR MOUNT

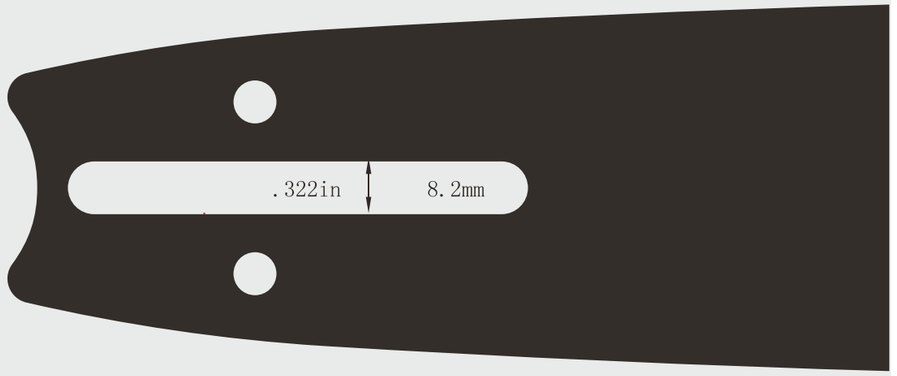

1:1

≡ EC

MAKITA

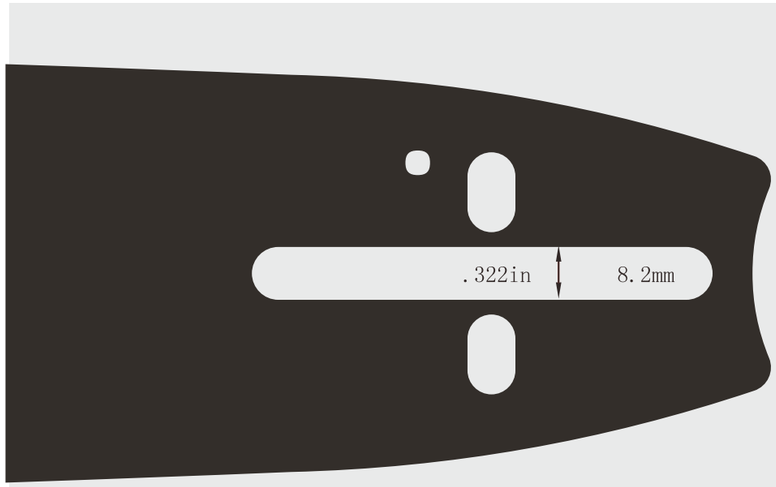


OREGON D176

1:1

≡ EX

ECHO		POULAN/ POULAN PRO	
MCCULLOCH		REDMAX	
JOHN DEERE	FAIRMONT	TANAKA	SKIL

BAR MOUNT

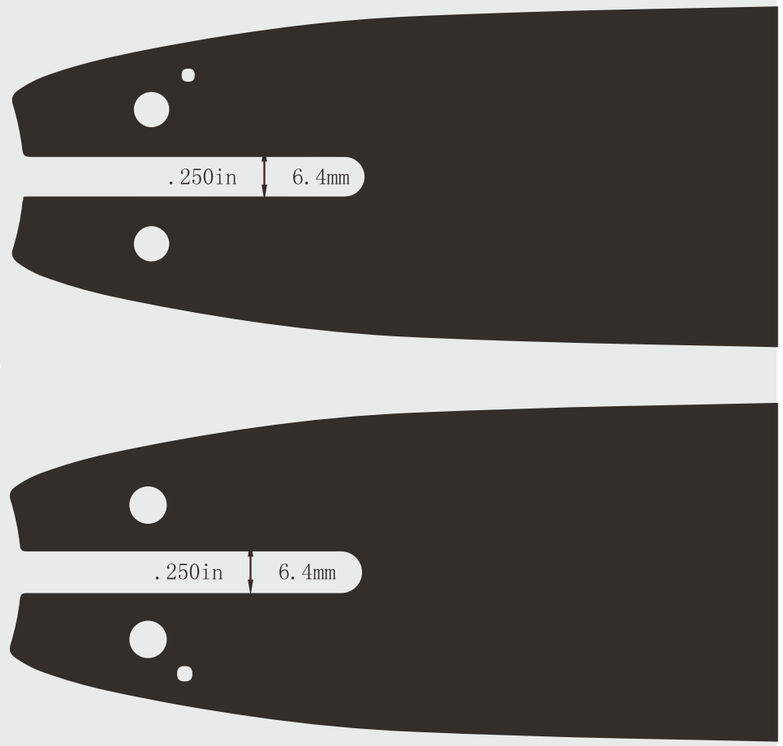


OREGON A318

1:1

≡ L (M)

POWER PRUNER/ ECHO	
BLACK & DECKER POWER PRUNER	POLESAWS REDMAX

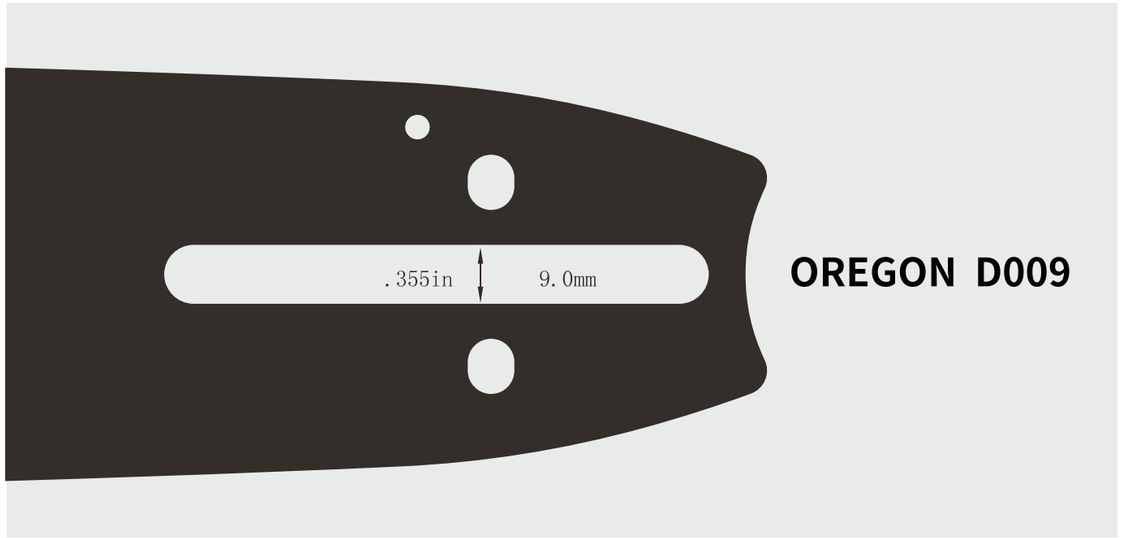


OREGON D009

1:1

≡ V

HUSQVARNA	PARTNER
JONSERED	SHINDAIWA
MAKITA	DOLMAR
SOLO	


BAR MOUNT

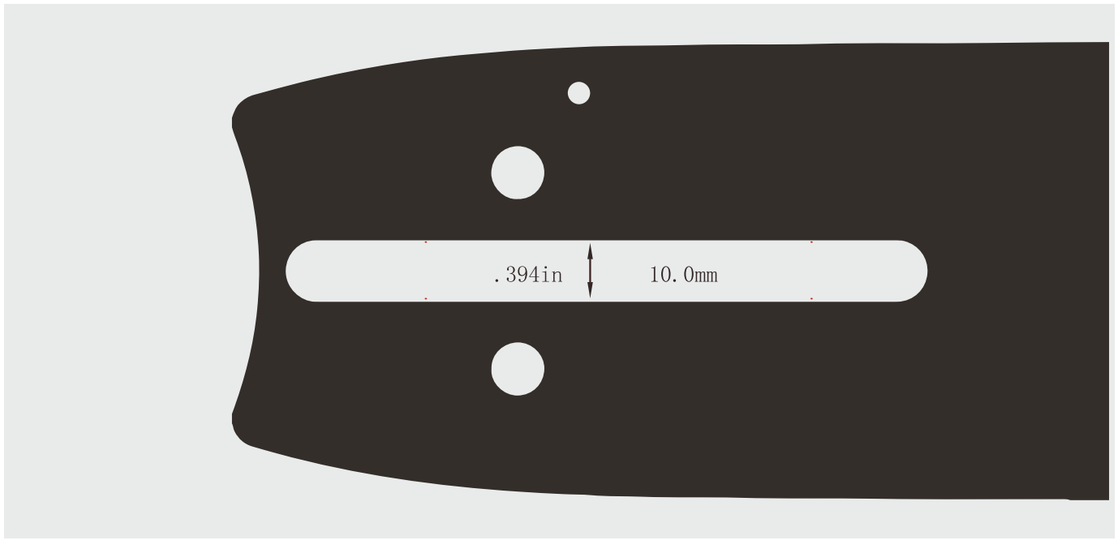

1:1

≡ OR

DRUSZBA ALL MODELS

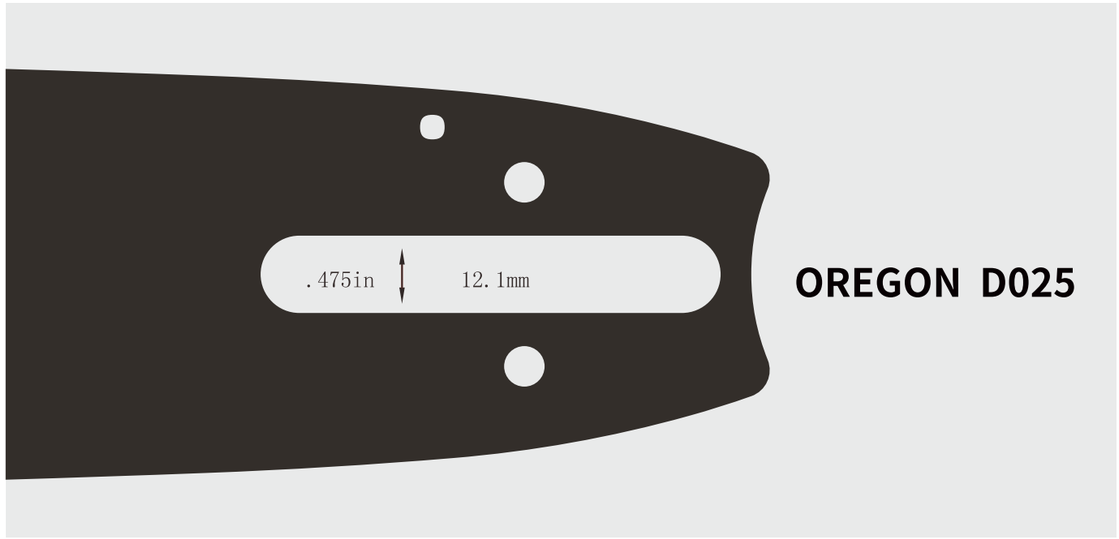


1:1

≡ S

STIHL
OLEO-MAC


BAR MOUNT

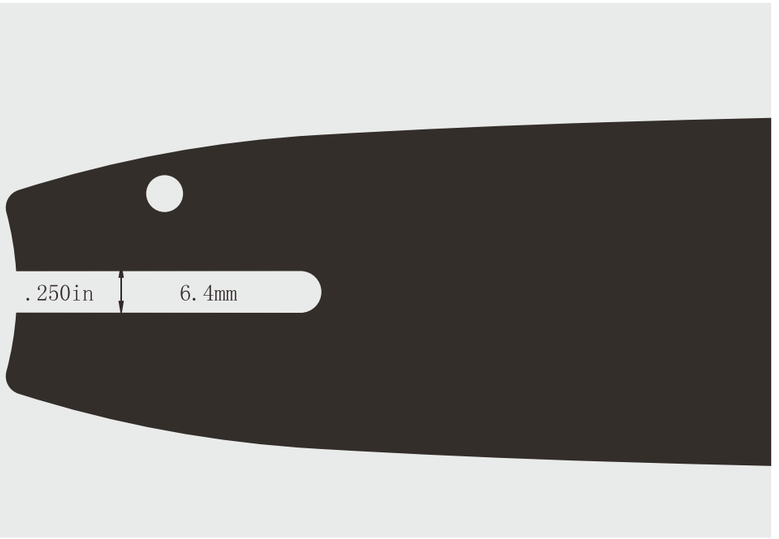

1:1

≡ F

HUSQVARNA	PARTNER
JONSERED	FRONTIER DYNAMARK
SKIL EINHELL DANARM PLONEER LOMBARD JOBU	

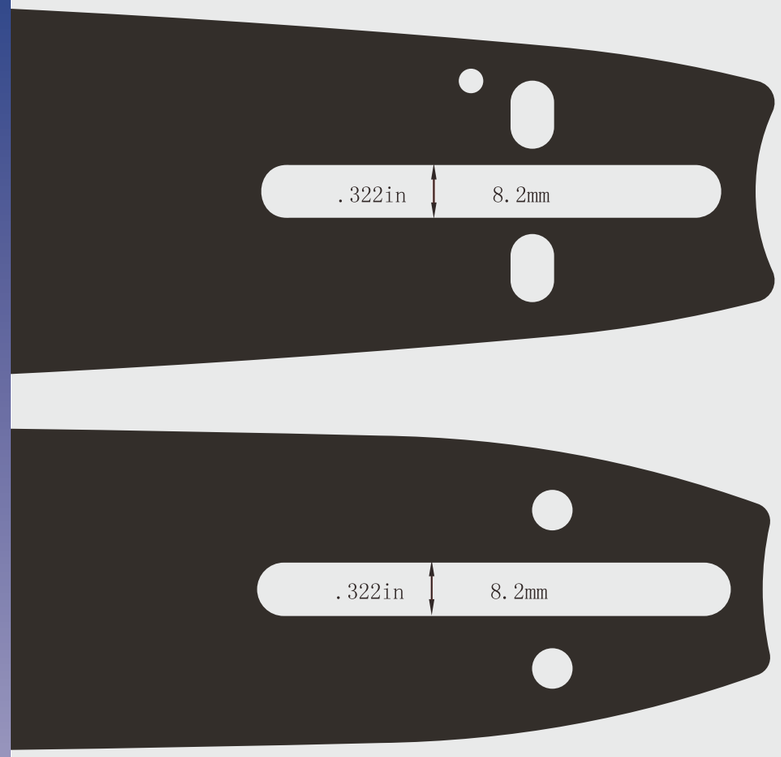

OREGON A041


≡ P (E)

1:1

HUSQVARNA	MAKITA
MCCULLOCH	SHINDAIWA
JONSERED	REDMAX
DOLMAR	POULAN/POULAN PRO
HOMELITE	JOHN DEERE

BAR MOUNT


OREGON K095

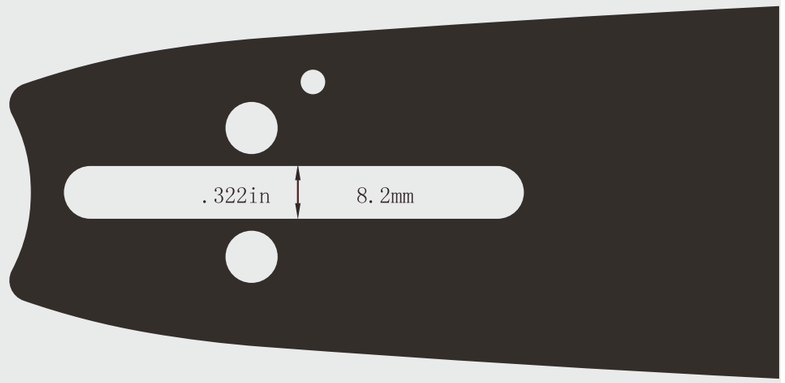

1:1

≡ U→E

HUSQVARNA	MAKITA
MCCULLOCH	SHINDAIWA
JONSERED	REDMAX
DOLMAR	POULAN/POULAN PRO
HOMELITE	JOHN DEERE

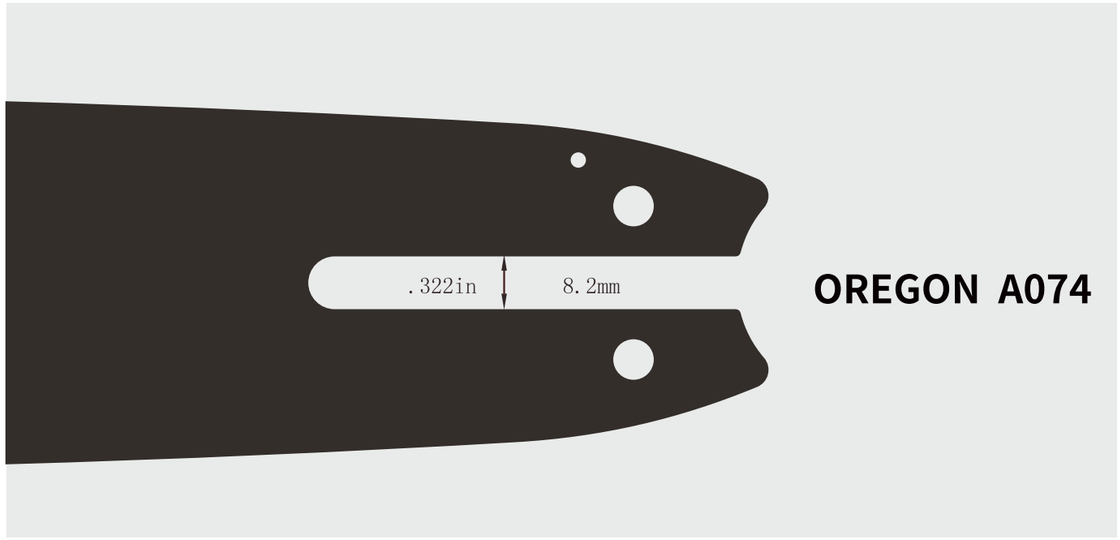

OREGON A074

1:1


≡ G

ALPINA		STIHL	
OLYMPYK			
GARDEN	CASTOR	OLEO-MAC	METABO

Chain saw parts / Guide bars & Chains / Accessories

BAR MOUNT

OREGON D024

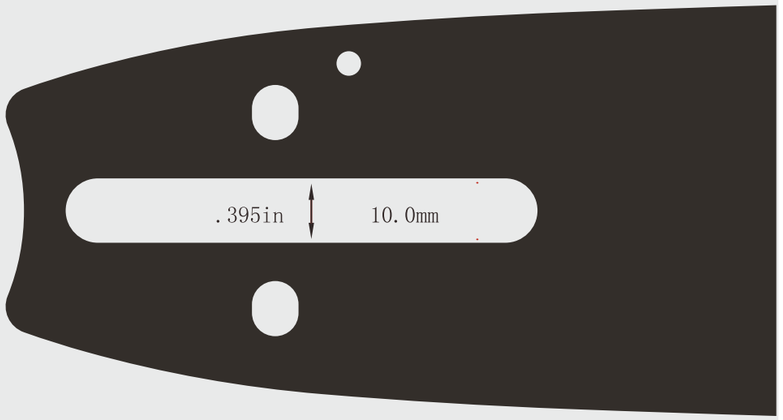

1:1

≡ J

JONSERED	OLYMPYK
OLEO-MAC	

中导齿厚度 GAUGE	链条节距 PITCH	齿数 LINK	导板长度 LENGTH	产品型号 PART No	型号对照 COMPARISON OREGON	GB
DOLMAR						
100,101,102,103,104,105,108,ES-161,PS-34,PS-340,PS-341,PS-400,PS-401,PS-3300th						
.050	3/8	45	12"	AP12-45-507P	120SDEA041	PO12-50SW
		52	14"	AP14-52-507P	140SDEA041	PO14-50SW
		56	16"	AP16-56-507P	160SDEA041	PO16-50SW
		62	18"	AP18-62-507P	180SDEA041	PO18-50Sw
110,111,112,113,114,115,116,116sj117,118,119,PS-540,PS-6000j,120Super,120si,PS-6800i						
.058	3/8	60	16"	AU16-60-5811P	168SLHKO95	UHL16-58SG
		64	18"	AU18-64-5811P	188SLHK095	UHL18-58SG
PS-6400,pS-7300,PS-7900,pS900o,pS9010FL						
.050	3/8	60	16"	AV16-60-5011P	160SLHD009	HV16-50SG
		68	18"	AV18-68-5011P	180SLHD009	HV18-50SG
		72	20"	AV20-72-5011P	200SLHD009	HV20-50SG
		84	24"	AV24-84-5011P	240SLHD009	HV24-50SG
.058		60	16"	AV16-60-5811P	168SLHD009	HV16-58SG
		68	18"	AV18-68-5811P	188SLHD009	HV16-58SG
		72	20"	AV20-72-5811P	208SLHD009	HV16-58SG
		84	24"	AV24-84-5811P	248SLHD009	HV16-58SG
109,110,111,115,PS540						
.050	.325	66	16"	BU16-66-5012P	160SLGK095	UHL16-50SH
		72	18"	BU18-72-5010P	180SLBK095	UHL18-50SF
		72	18"	BU18-72-5012P	180SLGK095	UHL18-50SH
		78	20"	BU20-78-5010P	200SLBK095	UHL20-50SH
		56	13"	BP13-56-5010P	130MPBK041	PO13-50SF
		64	15"	BP15-64-5010P	150MPBK041	PO15-50SF
		66	16"	BP16-66-5010P	160MPBK041	PO16-50SF
		72	18"	BP18-72-5010P	180MPBK041	PO18-50SF
.058		78	20"	BP20-78-5010P	200MPBK041	PO20-50SF
		56	13"	BU13-56-5810P	138SLBK095	UHL13-58SF
		64	15"	BU15-64-5810P	158SLBK095	UHL15-58SF
		64	15"	BU15-64-5812P	158SLGK095	UHL15-58SH
		66	16"	BU16-66-5810P	168SLBK095	UHL16-58SF

中导齿厚度 GAUGE	链条节距 PITCH	齿数 LINK	导板长度 LENGTH	产品型号 PART No	型号对照 COMPARISON OREGON	GB
.058	.325	66	16"	BU16-66-5812P	168SLGK095	UHL16-58SH
		72	18"	BU18-72-5810P	188SLBK095	UHL18-58SF
		72	18"	BU18-72-5812P	188SLGK095	UHL18-58SH
		78	20"	BU20-78-5810P	208SLBK095	UHL20-58SF
ALPINA						
A-40,C-40,CP-41,CP-45,CP-540,CP600,PRO-41,PRO-45,PRO-540,PRO-600						
.050	.325	72	18"	BU18-72-5010P	180SLBK095	UHL18-50SF
		78	20"	BU20-78-5010P	200SLBK095	UHL20-50SF
		66	16"	BU16-66-5012P	160SLGK095	UHL16-50SH
		72	18"	BU18-72-5012P	180SLGK095	UHL18-50SH
		56	13"	BP13-56-5010P	130MPBK041	PO13-50SF
		64	15"	BP15-64-5010P	150MPBK041	PO15-50SF
		66	16"	BP16-66-5010P	160MPBK041	PO16-50SF
		72	18"	BP18-72-5010P	180MPBK041	PO18-50SF
		78	20"	BP20-78-5010P	200MPBK041	PO20-50SF
.058		56	13"	BU13-56-5810P	138SLBK095	UHL13-58SF
		64	15"	BU15-64-5810P	158SLBK095	UHL15-58SF
		66	16"	BU16-66-5810P	168SLBK095	UHL16-58SF
		72	18"	BU18-72-5810P	188SLBK095	UHL18-58SF
		78	20"	BU20-78-5810P	208SLBK095	UHL20-58SF
		64	15"	BU15-64-5812P	158SLGK095	UHL15-58SH
		66	16"	BU16-66-5812P	168SLGK095	UHL16-58SH
		72	18"	BU18-72-5812P	188SLGK095	UHL18-58SH
ECHO						
E155,280,285,290,300,301,302,304,315,320,328,330,340,351,360,2000,2600,2800,2900,3000,3050,3400,3450,3500						
.050	3/8	45	12"	AP12-45-507P	120SDEA041	PO12-50SW

					型号对照 COMPARISON	
中导齿厚度 GAUGE	链条节距 PITCH	齿数 LINK	导板长度 LENGTH	产品型号 PART No	OREGON	GB
.050	3/8	52	14"	AP14-52-507P	140SDEA041	PO14-50SW
		56	16"	AP16-56-507P	160SDEA041	PO16-50SW
		44	12"	AP12-44-509P	120SPEA041	PO12-50CR
		53	14"	AP14-53-509P	140SPEA041	PO14-50CR
		56	16"	AP16-56-509P	160SPEA041	PO16-50CR
.058	.325	64	15"	BP15-64-5810P	158SLBK041	PO15-58SF
60 , CS4 51,452,500.5 10,550, 600, 601,602,610, 650,660,670,701,702,750,801,802,5000,5500,5501,6700, 6701, 6702,8000,8001						
.058	3/8	76	22"	AEX22-76-5811P	228SLHD176	
		84	24"	AEX24-84-5811P	248SLHD176	
.050		60	16"	AEX16-60-5011P	160SLHD176	EX16-50SG
		68	18"	AEX18-68-5011P	180SLHD176	EX18-50SG
		72	20"	AEX20-72-5011P	200SLHD176	EX20-50SG
HUSQVARNA						
23,36,41,136,141,142,243, Electric 16,Electric 316						
.050	3/8	45	12"	AP12-45-507P	120SDEA041	PO12-50SW
		45	12"	AP12-45-509P	120SPEA041	PO12-50CR
		52	14"	AP14-52-507P	140SDEA041	PO14-50SW
		52	14"	AP14-52-509P	140SPEA041	PO14-50CR
		56	16"	AP16-56-507P	160SDEA041	PO16-50SW
		56	16"	AP16-56-509P	160SPEA041	PO16-50CR
		62	18"	AP18-62-507P	180SDEA041	PO18-50SW
55Rancher,357XP,357XPG,359						
.050	3/8	72	20"	AU20-72-5011P	200SLHK095	UHL20-58SG
257,261,262,262XP,362,362XP						


					型号对照 COMPARISON	
中导齿厚度 GAUGE	链条节距 PITCH	齿数 LINK	导板长度 LENGTH	产品型号 PART No	OREGON	GB
.050	3/8	72	20"	AU20-72-5011P	200SLHK095	UHL20-50SG
		62	18"	AU18-62-507P	180SDEA095	
		44	12"	AU12-44-509P	120SPEA095	
		52	14"	AU14-52-509P	140SPEA095	
		56	15"	AU15-56-509P	150SPEA095	
		64	18"	AU18-64-509P	180SPEA095	
		70	20"	AU20-70-509P	200SPEA095	
		50	13"	AU13-50-5810P	138SLHK095	
.058		56	15"	AU15-56-5811P	158SLHK095	
		57	16"	AU16-57-5811P		
		76	22"	AU22-76-5810P		
		60	16"	AU16-60-5811P	168SLHK095	UHL16-58SG
		68	18"	AU18-68-5811P	188SLHK095	UHL18-58SG
		72	20"	AU20-72-5811P	208SLHK095	UHL20-58SG
3640,41,42,45,49,51.55,55Rancher,136,141.,242,246,254,257,261,262,262XP,336,339XP,340,345,346,350,351,353,357XP,359						
.050	.325	56	13"	BP13-56-5010P	130MPBK041	PO13-50SF
		64	15"	BP15-64-5010P	150MPBK041	PO15-50SF
		66	16"	BP16-66-5010P	160MPBK041	PO16-50SF
		72	18"	BP18-72-5010P	180MPBK041	PO18-50SF
		78	20"	BP20-78-5010P	200MPBK041	PO20-50SF
33,36,38,40,41,42,44,45,49,50,51,55,57,133,136,137,140S,141,142,154, 234,238,240,242,242XP,243,246,254,254XP,340,345,346,346XP,350,351357XP,357XPG,359,360,444						
.050	.325	66	16"	BU16-66-5012P	160SLGK095	UHL16-50SH
		72	18"	BU18-72-5010P	180SLBK095	UHL18-50SF
		72	18"	BU18-72-5012P	180SLGK095	UHL18-50SH

中导齿厚度 GAUGE	链条节距 PITCH	齿数 LINK	导板长度 LENGTH	产品型号 PART No	型号对照 COMPARISON OREGON	GB
.050	.325	78	20"	BU20-78-5010P	200SLBK095	UHL20-50SH
.058		56	13"	BU13-56-5810P	138SLBK095	UHL13-58SF
		64	15"	BU15-64-5810P	158SLBK095	UHL15-58SF
		64	15"	BU15-64-5812P	158SLGK095	UHL15-58SH
		66	16"	BU16-66-5810P	168SLBK095	UHL16-58SF
		66	16"	BU16-66-5812P	168SLGK095	UHL16-58SH
		72	18"	BU18-72-5810P	188SLBK095	UHL18-58SF
		72	18"	BU18-72-5812P	188SLGK095	UHL18-58SH
		78	20"	BU20-78-5810P	208SLBK095	UHL20-58SH
61,160,162,260						
.050	3/8	60	16"	AV16-60-5011P	160SLHD009	HV16-50SG
		68	18"	AV18-68-5011P	180SLHD009	HV18-50SG
		72	20"	AV20-72-5011P	200SLHD009	HV20-50SG
		84	24"	AV24-84-5011P	240SLHD009	HV24-50SG
.058		52	13"	AV13-52-5811P	138SLHD009	HV13-58SG
		56	15"	AV15-56-5811P	158SLHD009	HV15-58SG
		60	16"	AV16-60-5811P	168SLHD009	HV16-58SG
		68	18"	AV18-68-5811P	188SLHD009	HV18-58SG
		72	20"	AV20-72-5811P	208SLHD009	HV20-58SG
		84	24"	AV24-84-5811P	248SLHD009	HV24-58SG
MCCULLOCH						
14A/S,EM 16						
.050	3/8	33	08"	AM08-33-507P	080SDEA318	
		40	10"	AM10-40-507P	100SDEA318	
		44	12"	AM12-44-509P	120SPEA318	
		44	12"	AM12-44-507P	120SDEA318	M12-50SW

中导齿厚度 GAUGE	链条节距 PITCH	齿数 LINK	导板长度 LENGTH	产品型号 PART No	型号对照 COMPARISON OREGON	GB
.050	3/8	49	14"	AM14-49-507P	140SDEA318	M14-50SW
		54	16"	AM16-54-507P	160SDEA318	M16-50SW
		60	18"	AM18-60-507P	180SDEA318	M18-50SW
		49	14"	AM14-49-509P	140SPEA318	M14-50CR
		54	16"	AM16-54-509P	160SPEA318	M16-50CR
		60	18"	AM18-60-509P	180SPEA318	M18-50CR
1849 AV2046 AV,4600,4700,4900,5000,5500,MS 1846 AV.MS 1849 AV,MS 2049, MS 2049 AV,PM1845 AV						
.050	.325	66	16"	BU16-66-5012P	160SLGK095	UHL16-50SH
		72	18"	BU18-72-5010P	180SLBK095	UHL18-50SF
		66	16"	BP16-66-5010P	160MPBK041	PO16-50SF
		72	18"	BP18-72-5010P	180MPBK041	PO18-50SF
		78	20"	BP20-78-5010P	200MPBK041	PO20-50SF
		72	18"	BU18-72-5012P	180SLGK095	UHL18-50SH
.058		66	16"	BU16-66-5812P	168SLGK095	UHL16-50SH
		72	18"	BU18-72-5810P	188SLBK095	UHL18-58SF
		72	18"	BU18-72-5812P	188SLGK095	UHL18-58SH
		78	20"	BU20-78-5810P	208SLBK095	UHL20-58SH
JONSERED						
2014,2016,2035,2036,2036 Turbo,2041,2045,2050,2050 Turbo,2054,2137,2138,CS 2137,2150						
.050	3/8	45	12"	AP12-45-507P	120SDEA041	PO12-50SW
		52	14"	AP14-52-507P	140SDEA041	PO14-50SW
		56	16"	AP16-56-507P	160SDEA041	PO16-50SW
		45	12"	AP12-45-509P	120SPEA041	PO12-50CR
		52	14"	AP14-52-509P	140SPEA041	PO14-50CR
		56	16"	AP16-56-509P	160SPEA041	PO16-50CR
36,361,365						

					型号对照 COMPARISON	
中导齿厚度 GAUGE	链条节距 PITCH	齿数 LINK	导板长度 LENGTH	产品型号 PART No	OREGON	GB
.050	3/8	50	14"	AF14-50-509P	140SPEA064	F14-50CR
		56	16"	AF16-56-509P	160SPEA064	F16-50CR
490,520SP, 525,535,590,2050,2051,2055,2063,CS-2159						
.058	3/8	60	16"	AU16-60-5811P	168SLHK095	UHL16-58SG
		64	18"	AU18-64-5811P	188SLHK095	UHL18-58SG
.050		72	20"	AU20-72-5011P	200SLHK095	UHL20-50SG
625,630,630 Super,630 West Coast,2065,2071,2077,2163,CS 2165,CS 2171,CS 2186						
.050	3/8	60	16"	AV16-60-5011P	160SLHD009	HV16-50SG
		68	18"	AV18-68-5011P	180SLHD009	HV18-50SG
		72	20"	AV20-72-5011P	200SLHD009	HV20-50SG
		84	24"	AV24-84-5011P	240SLHD009	HV24-50SG
.058		52	13"	AV13-52-5811P	138SLHD009	HV13-58SG
		56	15"	AV15-56-5811P	158SLHD009	HV15-58SG
		60	16"	AV16-60-5811P	168SLHD009	HV16-58SG
		68	18"	AV18-68-5811P	188SLHD009	HV18-58SG
		72	20"	AV20-72-5811P	208SLHD009	HV20-58SG
		84	24"	AV24-84-5811P	248SLHD009	HV24-58SG
60,61,62,621,66,70,75,77,80,81,110,111,601,751,801,820,830,910,920,930,939,941,1020						
.058	3/8	60	16"	AJ16-60-5811P	168SLHD024	JO16-58SG
		72	20"	AJ20-72-5811P	208SLHD024	JO20-58SG
670,2065,2071,2077,2083,8083ll,2049,2095						
.050	3/8	60	16"	AV16-60-5011P	160SLHD009	HV16-50SG
		68	18"	AV18-68-5011P	180SLHD009	HV18-50SG
		72	20"	AV20-72-5011P	200SLHD009	HV20-50SG
		84	24"	AV24-84-5011P	240SLHD009	HV24-50SG
.058		52	13"	AV13-52-5811P	138SLHD009	HV13-58SG

					型号对照 COMPARISON	
中导齿厚度 GAUGE	链条节距 PITCH	齿数 LINK	导板长度 LENGTH	产品型号 PART No	OREGON	GB
.058	3/8	56	15"	AV15-56-5811P	158SLHD009	HV15-58SG
		60	16"	AV16-60-5811P	168SLHD009	HV16-58SG
		68	18"	AV18-68-5811P	188SLHD009	HV18-58SG
		72	20"	AV20-72-5811P	208SLHD009	HV20-58SG
		84	24"	AV24-84-5811P	248SLHD009	HV24-58SG
45,49,50,51,52,370,410,420,425,435,450,455,510,521,535,2141,2145,2149,2149 Turbo						
.050		66	16"	BU16-66-5012P	160SLGK095	UHL16-50SH
		72	18"	BU18-72-5010P	180SLBK095	UHL18-50SF
		72	18"	BU18-72-5012P	180SLGK095	UHL18-50SH
.058	.325	56	13"	BU13-56-5810P	138SLBK095	UHL13-58SF
		64	15"	BU15-64-5810P	158SLBK095	UHL15-58SF
		64	15"	BU15-64-5812P	158SLGK095	UHL15-58SH
		66	16"	BU16-66-5810P	168SLBK095	UHL16-58SF
		66	16"	BU16-66-5812P	168SLGK095	UHL16-58SH
		72	18"	BU18-72-5810P	188SLBK095	UHL18-58SF
		72	18"	BU18-72-5812P	188SLGK095	UHL18-58SH
		78	20"	BU20-78-5810P	208SLBK095	UHL20-58SH
45,49,50,51,52,370,410,420,425,435,450,455,510,521,535,2141,2145,2149,2149 Turbo,2150,2152						
.050	.325	56	13"	BP13-56-5010P	130MPBK041	PO13-50SF
		64	15"	BP15-64-5010P	150MPBK041	PO15-50SF
		66	16"	BP16-66-5010P	160MPBK041	PO16-50SF
		72	18"	BP18-72-5010P	180MPBK041	PO18-50SF
		78	20"	BP20-78-5010P	200MPBK041	PO20-50SF
2014,2016,2036,2036Turbo,2040,2040 Turbo,2041,2045,2050,2050Turbo,2141,CS 2141,CS 2145,CS 2150,CS 2152						
.058	.325	66	16"	BP16-66-5812P	168SLGK041	PO16-58SH
		72	18"	BP18-72-5812P	188SLGK041	PO18-58SH

					型号对照 COMPARISON	
中导齿厚度 GAUGE	链条节距 PITCH	齿数 LINK	导板长度 LENGTH	产品型号 PART No	OREGON	GB
HOMELITE						
20,23,20AV,23AV,3300,3350,3800,3850,25, RANGER,3014						
.050	3/8	45	12"	AP12-45-507P	120SDEA041	PO12-50SW
		52	14"	AP14-52-507P	140SDEA041	PO14-50SW
		56	16"	AP16-56-507P	160SDEA041	PO16-50SW
		44	12"	AP12-44-509P	120SPEA041	PO12-50CR
		53	14"	AP14-53-509P	140SPEA041	PO14-50CR
		56	16"	AP16-56-509P	160SPEA041	PO16-50CR
23,130,150,250,252.290,300.340, XL76, CS40 , CS50, V1-123, V1-125, XL MINIXL 100SERIES,EZ AUTO,SUPER Ez100						
.050	.325	64	15"	BU15-64-5010P	150SLBK095	UHL15-50SF
		64	15"	BU15-64-5012P	150SLGK095	UHL15-50SH
		66	16"	BU16-66-5012P	160SLGK095	UHL18-50SF
		72	18"	BU18-72-5012P	180SLGK095	UHL18-50SH
25,27,27AV,4100,4150,4500,TIMBERMAN						
.050	.325	66	16"	BP16-66-5010P	160SLBK041	POX16-50SF
		72	18"	BP18-72-5010P	180SLBK041	POH18-50SF
MAKITA						
DCS 34 DCS 330S,DCS 330THDCS 340DCS 341DCS 390,DCS 39oS,DCS 400,DCS 401,5012B,5014NB,5016NB,UC3500,UC400						
.050	3/8	45	12	AP12-45-507P	120SDEA041	PO12-50SW
		52	14	AP14-52-507P	140SDEA041	PO14-50SW
		56	16"	AP16-56-507P	160SDEA041	PO16-50SW
		62	18"	AP18-62-507P	180SDEA041	PO18-50SW
		45	12"	AP12-45-509P	120SPEA041	PO12-50CR
		52	14"	AP14-52-509P	140SPEA041	PO14-50CR
		59	16"	AC16-59-509P		
		44	12"	AC12-44-509P		
DCS 520i,DCS 540, DCS 5200i,DCS 6000i						

					型号对照 COMPARISON	
中导齿厚度 GAUGE	链条节距 PITCH	齿数 LINK	导板长度 LENGTH	产品型号 PART No	OREGON	GB
.058	3/8	60	16"	AU16-60-5811P	168SLHK095	UHL16-58SG
		64	18"	AU18-64-5811P	188SLHK095	UHL18-58SG
.050		72	20"	AU20-72-5011P	200SLHK095	UHL20-50SG
DCS 430,DCS 431,DCS 520i,DCS 540,DCS 5200i						
.050	.325	66	16"	BU16-66-5012P	160SLGK095	UHL16-50SH
		72	18"	BU18-72-5010P	180SLBK095	UHL18-50SF
		72	18"	BU18-72-5012P	180SLGK095	UHL18-50SH
		56	13"	BP13-56-5010P	130MPBK041	PO13-50SF
		64	15"	BP15-64-5010P	150MPBK041	PO15-50SF
		66	16"	BP16-66-5010P	160MPBK041	PO16-50SF
		72	18"	BP18-72-5010P	180MPBKD41	PO18-50SF
		78	20"	BP20-78-5010P	200MPBK041	PO20-50SF
.058		56	13"	BU13-56-5810P	138SLBK095	UHL13-58SF
		64	15"	BU15-64-5810P	158SLBK095	UHL15-58SF
		64	15"	BU15-64-5812P	158SLGK095	UHL15-58SH
		66	16"	BU16-66-5810P	168SLBK095	UHL16-58SF
		66	16"	BU16-66-5812P	168SLGK095	UHL16-58SH
		72	18"	BU18-72-5810P	188SLBK095	UHL18-58SF
		72	18"	BU18-72-5812P	188SLGK095	UHL18-58SH
		78	20"	BU20-78-5810P	208SLBK095	UHL20-58SH
PARTNER						
330,350,1601,1602,1610,1611,1612,1613,1614,1616,Mini-P Series,Spartan						
.050	3/8	45	12"	AP12-45-507P	120SDEA041	PO12-50SW
		52	14"	AP14-52-507P	140SDEA041	PO14-50SW
		56	16"	AP16-56-509P	160SPEA041	PO16-50C
330,350,1601,1602,1610,1612,1613,1614,1616						



中导齿厚度 GAUGE	链条节距 PITCH	齿数 LINK	导板长度 LENGTH	产品型号 PART No	型号对照 COMPARISON OREGON	GB
.050	3/8	56	16"	AF16-56-509P	160SPEA064	F16-50CR
550,1655,2055.P-55,R-11,R-14,R-16,R-17,R-18,R-19,R-20 ,R-21,R-22,R-23 ,R-30 ,R-35,R-40 ,R-416 ,S-50 ,55 ,S-65						
.050	3/8	60	16"	AV16-60-5011P	160SLHD009	HV16-50SG
		68	18"	AV18-68-5011P	180SLHD009	HV18-50SG
		72	20"	AV20-72-5011P	200SLHD009	HV20-50SG
		84	24"	AV24-84-5011P	240SLHD009	HV24-50SG
.058		52	13"	AV13-52-5811P	138SLHD009	HV13-58SG
		56	15"	AV15-56-5811P	158SLHD009	HV15-58SG
		60	16"	AV16-60-5811P	168SLHD009	HV16-58SG
		68	18"	AV18-68-5811P	188SLHD009	HV18-58SG
		72	20"	AV20-72-5811P	208SLHD009	HV20-58SG
P-360, P-400, P-450, P-500, P-5000						
.050	.325	72	18"	BU18-72-5010P	180SLBK095	UHL18-50SF
		66	16"	BU16-66-5012P	160SLGK095	UHL16-50SH
		72	18"	BU18-72-5012P	180SLGK095	UHL18-50SH
		56	13"	BP13-56-5010P	130MPBK041	PO13-50SF
		64	15"	BP15-64-5010P	150MPBK041	PO15-50SF
		66	16"	BP16-66-5010P	160MPBK041	PO16-50SF
		72	18"	BP18-72-5010P	180MPBK041	PO18-50SF
		78	20"	BP20-78-5010P	200MPBK041	PO20-50SF
.058		56	13"	BU13-56-5810P	138SLBK095	UHL13-58SF
		64	15"	BU15-64-5810P	158SLBK095	UHL15-58SF
		66	16"	BU16-66-5810P	168SLBK095	UHL16-58SF
		72	18"	BU18-72-5810P	188SLBK095	UHL18-58SF
		64	15"	BU15-64-5812P	158SLGK095	UHL15-58SH
		66	16"	BU16-66-5812P	168SLGK095	UHL16-58SH

中导齿厚度 GAUGE	链条节距 PITCH	齿数 LINK	导板长度 LENGTH	产品型号 PART No	型号对照 COMPARISON OREGON	GB
.058	.325	72	18"	BU18-72-5812P	188SLGK095	UHL18-58SH
		76	20"	BU20-76-5812P	208SLGK095	UHL20-58SH
		66	16"	BU16-66-5812P	168SLGK095	UHL16-58SH
		72	18"	BU18-72-5812P	188SLGK095	UHL18-58SH
		78	20	BU20-78-5810P	208SLBK095	UHL20-58SH
410,510,540						
.050	.325	56	13"	BU13-56-5010P	130MPBK095	PO13-50SF
		64	15"	BP15-64-5010P	150MPBK041	PO15-50SF
OLYMPYK						
240,241,244,935, OLE 140FOLE 300						
.050	3/8	50	14"	AG14-50-507P	140SDEA074	SW14-50SW
		55	16"	AG16-55- 507P	160SDEA074	SW16-50SW
		50	14"	AG14-50-509P	140SPEA074	SW14-50CR
		55	16"	AG16-55-509P	160SPEA074	SW16-50CR
250,250A,251,252,254,260,261,264,355,460A Super						
.058	3/8	60	16"	AJ16-60-5811P	168SLHD024	J016-58SG
		72	20"	AJ20-72-5811P	208SLHD024	J020-58SG
272, 280,284,461,480A Super,481,970,980,Super 482						
.058	3/8	56	15"	AJ15-56-5811P	158SLHD024	
		60	16"	AJ16-60-5811P	168SLHD024	JO16-58SG
		68	18"	AJ18-68-5811P	188SLHD024	
		72	20"	AJ20-72-5811P	208SLHD024	JO20-58SG

中导齿厚度 GAUGE	链条节距 PITCH	齿数 LINK	导板长度 LENGTH	产品型号 PART No	型号对照 COMPARISON OREGON	GB
38,940C, 941,945,950,951,956,962						
.050	.325	66	16''	BP16-66-5010P	160MPBK041	PO16-50SF
		72	18"	BP18-72-5010P	180MPBK041	PO18-50SF
		78	20"	BP20-78-5010P	200MPBK041	PO20-50SF
.058		66	16"	BU16-66-5810P	168SLBK095	UHL16-58SF
		72	18"	BU18-72-5810P	188SLBK095	UHL18-58SF
		66	16"	BU16-66-5812P	168SLGK095	UHL16-58SH
		72	18"	BU18-72-5812P	188SLGK095	UHL18-58SH
		78	20"	BU20-78-5810P	208SLBK095	UHL20-58SH
REDMAX-ZENOAH						
G250,G300AVS,G300TS,G310TS,G2500,G2500TS,G3100,G24000						
.050	3/8	45	12"	AP12-45-507P	120SDEA041	PO12-50SW
		52	14"	AP14-52-507P	140SDEA041	PO14-50SW
		56	16"	AP16-56-507P	160SDEA041	PO16-50SW
		62	18"	AP18-62-507P	180SDEA041	PO18-50SW
		45	12"	AP12-45-509P	120SPEA041	PO12-50CR
		52	14"	AP14-52-509P	140SPEA041	PO14-50CR
		57	16"	AP16-57-509P	160SPEA041	PO16-50CR
G390,G450AVS,G455AVS,G3800,G3800AVS,G5000						
.050	.325	66	16"	BU16-66-5012P	160SLGK095	UHL16-50SH
		72	18"	BU18-72-5010P	180SLBK095	UHL18-50SF
		56	13''	BP13-56-5010P	130MPBK041	PO13-50SF
		64	15"	BP15-64-5010P	150MPBK041	PO15-50SF
		66	16"	BP16-66-5010P	160MPBK041	PO16-50SF
		72	18"	BP18-72-5010P	180MPBK041	PO18-50SF
		78	20"	BP20-78-5010P	200MPBK041	PO20-50SF

中导齿厚度 GAUGE	链条节距 PITCH	齿数 LINK	导板长度 LENGTH	产品型号 PART No	型号对照 COMPARISON OREGON	GB
.050	.325	72	18"	BU18-72-5012P	180SLGK095	UHL18-50SH
.058		56	13"	BU13-56-5810P	138SLBK095	UHL13-58SF
		64	15"	BU15-64-5810P	158SLBK095	UHL15-58SF
		64	15"	BU15-64-5812P	158SLGK095	UHL15-58SH
		66	16"	BU16-66-5810P	168SLBK095	UHL16-58SF
		66	16"	BU16-66-5812P	168SLGK095	UHL16-58SH
		72	18"	BU18-72-5810P	188SLBK095	UHL18-58SF
		72	18"	BU18-72-5812P	188SLGK095	UHL18-58SH
		76	20"	BU20-76-5812P	208SLGK095	UHL20-58SH
SHINDAIWA						
90,100,110,120,140,150, Electric,300,300S						
.050	3/8	45	12"	AP12-45-507P	120SDEA041	PO12-50SW
		52	14"	AP14-52-507P	140SDEA041	PO14-50SW
		56	16"	AP16-56-507P	160SDEA041	PO16-50SW
		45	12"	AP12-45-509P	120SPEA041	PO12-50CR
		52	14"	AP14-52-509P	140SPEA041	PO14-50CR
		56	16"	AP16-56-509P	160SPEA041	PO16-50CR
		62	18"	AP18-62-507P	180SDEA041	PO18-50SW
680,695,757,757C757W						
.050	3/8	60	16"	AV16-60-5011P	160SLHD009	HV16-50SG
		68	18"	AV18-68-5011P	180SLHD009	HV18-50SG
		72	20"	AV20-72-5011P	200SLHD009	HV20-50SG
		84	24"	AV24-84-5011P	240SLHD009	HV24-50SG
.058		52	13"	AV13-52-5811P	138SLHD009	HV13-58SG
		56	15"	AV15-56-5811P	158SLHD009	HV15-58SG
		60	16"	AV16-60-5811P	168SLHD009	HV16-58SG

					型号对照 COMPARISON	
中导齿厚度 GAUGE	链条节距 PITCH	齿数 LINK	导板长度 LENGTH	产品型号 PART No	OREGON	GB
.058	3/8	68	18"	AV18-68-5811P	188SLHD009	HV18-58SG
		72	20"	AV20-72-5811P	208SLHD009	HV20-58SG
		84	24"	AV24-84-5811P	248SLHD009	HV24-58SG
		64	17"	AV17-64-5811P	178SLHD009	HV17-58SG
360,366,377,400,415,000,000,000,000,000						
.050	.325	66	16"	BU16-66-5012P	160SLGK095	UHL16-50SH
		72	18"	BU18-72-5010P	180SLBK095	UHL18-50SF
		72	18"	BU18-72-5012P	180SLGK095	UHL18-50SH
STIHL						
009,009L010,011012,015,017,018,018CO19,019TO20,020T,021023,023C,Q23LE10,E14E 140)E18O0,E 180CMS17, MS 18C.MS191T,MS 210,MS 210C,MSE 140,MSE 180CPole pruner.HT70,HT 75(ANS B 175.1 does not apply to pole puners						
.050	3/8	44	12"	AG12-44-507P	120SDEA074	SW12-50SW
		50	14"	AG14-50-507P	140SDEA074	SW14-50SW
		55	16"	AG16-55-507P	160SDEA074	SW16-50SW
		44	12"	AG12-44-509P	120SPEA074	SW12-50CR
		50	14"	AG14-50-509P	140SPEA074	SW14-50CR
		55	16"	AG16-55- 509P	160SPEA074	SW16-50CR
		60	18"	AG18-60-509P	180SPEA074	SW18-50CR
029,030,031,032,034,036,036P,036 Pro,036QS,040,MS 290,MSE 220QMS 310,MS 360,MS 360 Pro,MS 360QS						
.063	3/8	50	13"	AS13-50-6311P	133SLHD025	SN13-63SG
		56	15"	AS15-56-6311P	153SLHD025	SN15-63SG
		60	16"	AS16-60-6311P	163SLHD025	SN16-63SG
		66	18"	AS18-66-6311P	183SLHD025	SN18-63SG
		72	20"	AS20-72-6311P	203SLHD025	SN20-63SG
		84	24"	AS24-84-6311P	243SLHD025	SN24-63SG
		76	22"	AS22-76-6311P	223SLHD025	SN22-63SG

					型号对照 COMPARISON	
中导齿厚度 GAUGE	链条节距 PITCH	齿数 LINK	导板长度 LENGTH	产品型号 PART No	OREGON	GB
021,025,025C,MS 250,MS 250C						
.063	.325	62	16"	BG16-62-6311P	163SLBA074	SW16-63SH
		68	18"	BG18-68-6311P	183SLBA074	SW18-63SH
024,026,026P,026 Pro,028, 028, Super,029,030,031,032,034,036,036P,039,Farm Boss,MS 260,MS 260 Pro,MS270, MS 27OC,MS 270 CQS,MS 280 CQs,MS 290,MS 360 Pro,MS 360 Qs						
.063	.325	56	13"	BS13-56-6312P	133SLGD025	SN13-63SH
		62	15"	BS15-62-6312P	153SLGD025	SN15-63SH
		67	16"	BS16-67-6312P	163SLGD025	SN16-63SH
		74	18"	BS18-74-6312P	183SLGD025	SN18-63SH
		81	20"	BS20-81-6312P	203SLGD025	SN16-63SH
		86	22"	BS22-86-6312P	223SLGD025	SN22-63SH
		94	24"	BS24-94-6312P	243SLGD025	SN24-63SH
POULAN/POULAN PRO						
25A180,19Q,200,205,210220,221225,230,235,236,240,255,260,1220,1800,1900,190OLE,1950,1950LE,1975LE.20002050, 2055,2055LE2075,2075C2150,2155,2175,2250,225OLE2300,2350,2375,2375LE.2450,2550,3315,3416,3816,3816AV3818, 4018,4218,4218AVE14EE16EMicro 25(XX Series and XxV Series);S23,S25,S25AV,S25CVA,S25D;Electric Models1420,1425,1625,2100,2400,2500,260OElectric Pro 40OE,Patriot 1900,widthing,Woodshark continued on the next page						
.050	3/8	40	10"	AP10-40-507P	100SDEA041	PO10-50SW
		45	12"	AP12-45-507P	120SDEA041	PO12-50SW
		52	14"	AP14-52-507P	140SDEA041	PO14-50SW
		56	16"	AP16-56-507P	160SDEA041	PO16-50SW
		62	18"	AP18-62-507P	180SDEA041	PO18-50SW
		45	12"	AP12-45-509P	120SPEA041	PO12-50CR
		52	14"	AP14-52-509P	140SPEA041	PO14-50CR
		56	16"	AP16-56-509P	160SPEA041	PO16-50CR
415,425,445,475, 505						
.050	3/8	60	16"	AV16-60-5011P	160SLHD009	HV16-50SG

中导齿厚度 GAUGE	链条节距 PITCH	齿数 LINK	导板长度 LENGTH	产品型号 PART No	型号对照 COMPARISON OREGON	GB
.050	3/8	68	18"	AV18-68-5011P	180SLHD009	HV18-50SG
		72	20"	AV20-72-5011P	200SLHD009	HV20-50SG
		84	24"	AV24-84-5011P	240SLHD009	HV24-50SG
.058		52	13"	AV13-52-5811P	138SLHD009	HV13-58SG
		56	15"	AV15-56-5811P	158SLHD009	HV15-58SG
		60	16"	AV16-60-5811P	168SLHD009	HV16-58SG
		68	18"	AV18-68-5811P	188SLHD009	HV18-58SG
		72	20"	AV20-72-5811P	208SLHD009	HV20-58SG
		84	24"	AV24-84-5811P	248SLHD009	HV124-58SG
395,3900, 4000,4200,4400,4900,5200,5400,5500,6700						
.050	3/8	60	16"	AEX16-60-5011P	160SLHD176	EX16-50SG
		68	18"	AEX18-68-5011P	180SLHD176	EX18-50SG
		72	20"	AEX20-72-5011P	200SLHD176	EX20-50SG
255,285,295,305,306SA,310,315,335 Predator,336,2700,2750,2775,2800,2900,3000,3050,3100,3300						
.050	.325	72	18"	BP18-72-5010P	180SLBK041	PO18-50SF
		72	18"	BP18-72-5012P	180SLGK041	PO18-58SH
325						
.050	.325	66	16"	BU16-66-5012P	160SLGK095	UHL16-50SH
		72	18"	BU18-72-5010P	180SLBK095	UHL18-50SF
		72	18"	BU18-72-5012P	180SLGK095	UHL18-50SH
		56	13"	BP13-56-5010P	130MPBK041	PO13-50SF
		64	15"	BP15-64-5010P	150MPBK041	PO15-50SF
		66	16"	BP16-66-5010P	160MPBK041	PO16-50SF
		72	18"	BP18-72-5010P	180MPBK041	PO18-50SF
		78	20"	BP20-78-5010P	200MPBK041	PO20-50SF
.058		56	13"	BU13-56-5810P	138SLBK095	UHL13-58SF

中导齿厚度 GAUGE	链条节距 PITCH	齿数 LINK	导板长度 LENGTH	产品型号 PART No	型号对照 COMPARISON OREGON	GB
.058	.325	64	15"	BU15-64-5810P	158SLBK095	UHL15-58SF
		64	15"	BU15-64-5812P	158SLGK095	UHL15-58SH
		66	16"	BU16-66-5810P	168SLBK095	UHL16-58SF
		66	16"	BU16-66-5812P	168SLGK095	UHL16-58SH
		72	18"	BU18-72-5810P	188SLBK095	UHL18-58SF
		72	18"	BU18-72-5812P	188SLGK095	UHL18-58SH
		76	20"	BU20-76-5812P	208SLGK095	UHL20-58SH

PRO TOP BARS

AC

.050	3/8	59	16"	AC16-X-59-509P		

AEX


.050	3/8	60	16"	AEX16-X-60-5011T		
		68	18"	AEX18-X-68-5011T		
		72	20"	AEX20-X-72-5011T		
		70	20"	AEX20-X-70-5011T		
		81	24"	AEX24-X-81-5011T		
		92	28"	AEX28-X-92-5011T		
.058		72	20"	AEX20-X-72-5811T		

AG

.050	3/8	50	14"	AG14-X-50-509T		

AJ

.058	3/8	60	16"	AJ16-X-60-5811T		
		68	18"	AJ18-X-68-5811T		

				
中导齿厚度 GAUGE	链条节距 PITCH	齿数 LINK	导板长度 LENGTH	产品型号 PART No
AS				
.050	3/8	60	16"	AS16-X-60-5011T
		72	20"	AS20-X-72-5011T
		84	24"	AS24-X-84-5011T
		91	28"	AS28-X-91-5011T
		98	30"	AS30-X-98-5011T
		114	14"	AS36-X-114-5011T
.058		72	20"	AS20-X-72-5811T
.063		56	15"	AS15-X-56-6311T(短)
		60	16"	AS16-X-60-6311T
		66	18"	AS18-X-66-6311T
		72	20"	AS20-X-72-6311T
		76	22"	AS22-X-76-6311T
		84	24"	AS24-X-84-6311T
		91	28"	AS28-X-91-6311T
		98	30"	AS30-X-98-6311T
		105	32"	AS32-X-105-6311T
		136	42"	AS42-X-136-6311T
ASS				
.063	3/8	75	21"	ASS21-X-75-6311T
ASLD				
.063	3/8	100	30"	ASLD30-X-100-6311T
AU				
.050	3/8	68	18"	AU18-X-68-5011T
		70	20"	AU20-X-70-5011T

				
中导齿厚度 GAUGE	链条节距 PITCH	齿数 LINK	导板长度 LENGTH	产品型号 PART No
.050	3/8	72	20"	AU20-X-72-5011T
.058		91	28"	AU28-X-91-5011T
		93	28"	AU28-X-93-5011T
		56	15"	AU15-X-56-5811P(短)
		60	16"	AU16-X-60-5811T
		68	18"	AU18-X-68-5811T
		72	20"	AU20-X-72-5811T
		76	22"	AU22-X-76-5811T
		84	24"	AU24-X-84-5811T
.063		68	18"	AU18-X-68-6311T
AUX				
.050	3/8	68	18"	AUX18-X-68-5011T
		72	20"	AUX20-X-72-5011T
.058		68	18"	AUX18-X-68-5811T
		84	24"	AUX24-X-84-5811T
AV				
.050	3/8	60	16"	AV16-X-60-5011T
		72	20"	AV20-X-72-5011T
		84	24"	AV24-X-84-5011T
		93	28"	AV28-X-93-5011T
		98	30"	AV30-X-98-5011T
		105	32"	AV32-X-105-5011T
.058		56	15"	AV15-X-56-5811T
		60	16"	AV16-X-60-5811T
		68	18"	AV18-X-68-5811T

中导齿厚度 GAUGE	链条节距 PITCH	齿数 LINK	导板长度 LENGTH	产品型号 PART No
.058	3/8	72	20"	AV20-X-72-5811T
		76	22"	AV22-X-76-5811T
		84	24"	AV24-X-84-5811T
		92	28"	AV28-X-92-5811T
		105	32"	AV32-X-105-5811T
		114	36"	AV36-X-114-5811T
		136	42"	AV42-X-136-5811T
.063		68	18"	AV18-X-68-6311T
		72	20"	AV20-X-72-6311T
		84	24"	AV24-X-84-6311T
		114	36"	AV36-X-114-6311T
		136	42"	AV42-X-136-6311T
BG				
.063	.325	62	16"	BG16-X-62-6311T
BP				
.050	.325	78	20"	BP20-X-78-5012T
BS				
.050	.325	72	18"	BS18-X-72-5012T
.063		63	15"	BS15-X-63-6312T(长)
BU				
.050	.325	64	15"	BU15-X-64-5012T
		66	16"	BU16-X-66-5012T
		72	18"	BU18-X-72-5012T
		78	20"	BU20-X-78-5012T
.058		64	15"	BU15-X-64-5812T

中导齿厚度 GAUGE	链条节距 PITCH	齿数 LINK	导板长度 LENGTH	产品型号 PART No
.058	.325	66	16"	BU16-X-66-5812T
		72	18"	BU18-X-72-5812T
		76	20"	BU20-X-76-5812T
		78	20"	BU20-X-78-5812T
.063		66	16"	BU16-X-66-6312T
		72	18"	BU18-X-72-6312T


HARVESTER BARS


.080	.404		75 29	FM4-75-80
			75 29	FM4-75-80TSN
			64 25	FM2-64-80TSN
			59 23	FM2-59-80RSN
			42 16	FM4-42-80TSN
			90 35	FM4-90-80TSN
			80 31	WM2-80-80TSN
.122	3/4		80 31	31Q1-BC-19
			90 36	36Q1-BC-38
			95 38	38Q1-BC-38
			115 45	45Q1-BC-38
			110 43	43Q1-BC-43
			135 52	52Q1-BC-45
			95 38	38Q1-BC-46
			110 43	43Q1-BC-52
			125 48	48Q1-BC-52
			66 26	26Q1-BC-25
			75 29	29Q1-BC-25


NEW MODEL / CHINESE MODEL

中导齿厚度 GAUGE	链条节距 PITCH	齿数 LINK	导板长度 LENGTH	产品型号 PART No
AE				
.050	3/8	44	12"	AE12-44-509P
		53	14"	AE14-53-509P
		57	16"	AE16-57-509P
		64	18"	AE18-64-509P
.058		57	16"	AE16-57-5811P
		64	18"	AE18-64-5811P
		68	20"	AE20-68-5811P
		76	22"	AE22-76-5810P
.063		76	22"	AE22-76-6310P
		84	24"	AE24-84-6311P
		84	24"	AE24-84-6311T(ZE)
		92	28"	AE28-92-6311T(ZE)
AEX				
.058	3/8	60	16"	AEX16-60-5811T(OR)
		68	18"	AEX18-68-5811T(OR)
		72	20"	AEX20-72-5811T(OR)
.063		84	24"	AEX24-84-6311T(ZE)
		92	28"	AEX28-92-6311T(ZE)
AV				

中导齿厚度 GAUGE	链条节距 PITCH	齿数 LINK	导板长度 LENGTH	产品型号 PART No
.058	3/8	60	16"	AV16-60-5811T(OR)
		68	18"	AV18-68-5811T(OR)
		72	20"	AV20-72-5811T(OR)
		84	24"	AV24-84-5811T(ZE)
		92	28"	AV28-92-5811T(ZE)
AS				
.063	3/8	66	18"	AS18-66-6311T(OR)
		72	20"	AS20-72-6311T(OR)
AP				
.043		28	06"	AP06-28-43P
.050		33	08"	AP08-33-507P
		36	08"	AP08-36-507P
		40	10"	AP10-40-507P
		53	14"	AP14-53-507P
		53	14"	AP14-53-507P-H
		57	16"	AP16-57-507P
		62	18"	AP18-62-507P-H
		40	10"	AP10-40-509P
		42	11.5"	AP11.5-42-508P
		56	16"	AP16-56-509P-H
		62	18"	AP18-62-509P
		64	18"	AP18-64-509P
AL				

				
中导齿厚度 GAUGE	链条节距 PITCH	齿数 LINK	导板长度 LENGTH	产品型号 PART No
.050	3/8	39	10"	AL10-39-507P
		44	12"	AL12-44-507P
AEC				
.050	3/8	48	12"	AEC12-48-509P
		53	14"	AEC14-53-509P
		58	16"	AEC16-58-509P
APA				
.063	3/8	64	17"	APA17-64-6311P
BU				
.058	.325	56	13"	BU13-56-5811P
		60	14"	BU14-60-5810P
BE				
		49	10"	BE10-49-58P-Y
.058	.325	50	12"	BE12-50-5810P
		60	14"	BE14-60-5810P
		64	16"	BE16-64-5810P
		66	16"	BE16-66-5810P
		72	18"	BE18-72-5810P
		72	18"	BE18-72-5810P-Y
		86	22"	BE22-86-5811P
		64	16"	BE16-64-5812P
		66	16"	BE16-66-5812P

				
中导齿厚度 GAUGE	链条节距 PITCH	齿数 LINK	导板长度 LENGTH	产品型号 PART No
.058	.325	72	18"	BE18-72-5812P
		76	20"	BE20-76-5812P
		94	24"	BE24-94-5812P
BP				
.058	.325	60	14"	BP14-60-5810P
		66	16"	BP16-66-5810P-H
		72	18"	BP18-72-5810P-H
		56	13"	BP13-56-5811P
		66	16"	BP16-66-5812P
		76	20"	BP20-76-5812P
CJ				
.063	.404	60	18"	CJ18-60-63T-HC
		64	20"	CJ20-64-63T
		64	20"	CJ20-64-63T-HC
COR				
.063	.404	64	20"	COR20-64-6310P
		64	20"	COR20-64-6310T(OR)
DG				
.043	1/4	56	10"	DG10-56-438P
		64	12"	DG12-64-438P
		72	14"	DG14-72-438P
		48	08"	DG08-48-438P(USW)

				
中导齿厚度 GAUGE	**链条节距 PITCH**	**齿数 LINK**	**导板长度 LENGTH**	**产品型号 PART No**
.043	1/4	56	10"	DG10-56-438P(USW)
		64	12"	DG12-64-438P(USW)
		72	14"	DG14-72-438P(USW)
锂电				
.043	1/4	28	4"	DL04-28-43P
		28	4"	DL04-28-435P
		32	5"	DL05-32-436P
		36	6"	DL06-36-43P
		41	7"	DL07-41-43P

备注

商标注册与认证



















导板零件

GUIDE PARTS



OR NOSE



KX NOSE



KX-BE18



78 CHAIN SAW NOSE



KX-BE20

Chain saw parts / Guide bars & Chains / Accessories



一

齿轮Rim

01

PITCH: 1/4
TEETH: 10
GAUGE: .043 .050



一

齿轮Rim

02

PITCH: 3/8
TEETH: 7
GAUGE: .043 .050



一

齿轮Rim

03

PITCH: 3/8
TEETH: 8
GAUGE: .050



一

齿轮Rim

04

PITCH: 3/8
TEETH: 9
GAUGE: .043 .050



齿轮Rim
05

PITCH: .325
TEETH: 10
GAUGE: .050 .058




齿轮Rim
06

PITCH: .325
TEETH: 11
GAUGE: .058




齿轮Rim
07

PITCH: 3/8
TEETH: 11
GAUGE: .050 .058 .063



齿轮Rim
08

PITCH: .325
TEETH: 12
GAUGE: .050 .058 .063




齿轮Rim
09

PITCH: .404
TEETH: 10
GAUGE: .063

接连器&断链器




CHAIN SPINNER

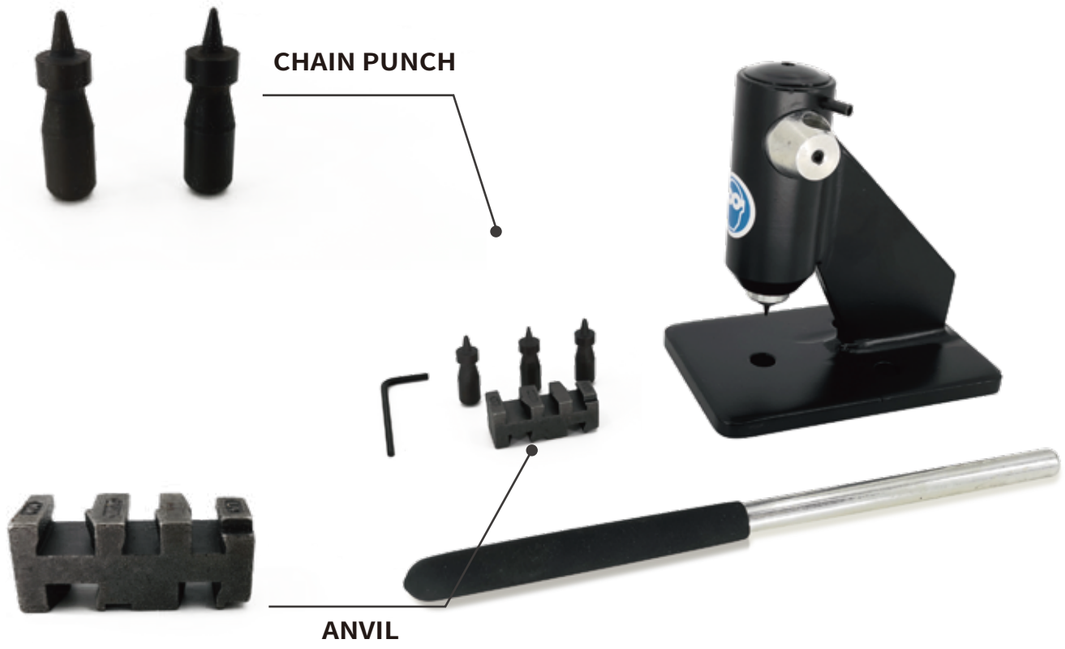


CHAIN BREAKER

套筒螺丝刀(三用)

WRENCH(THREE USE)

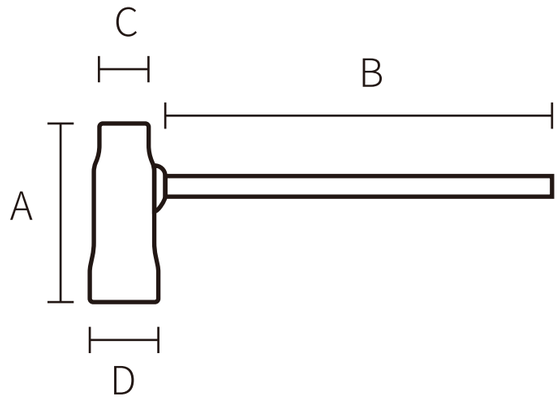

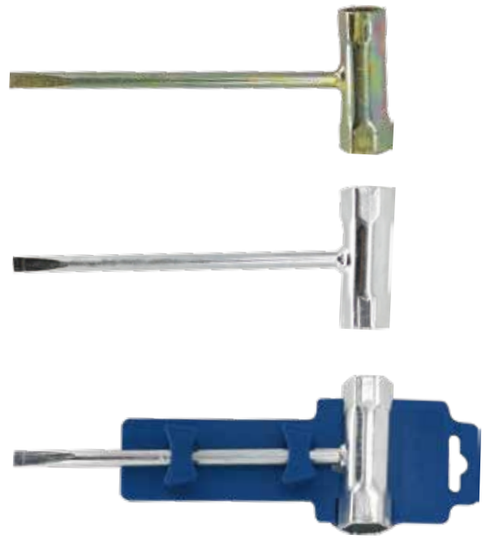

型号	A	B	C	D	φ
KX-001	85	140	13	19	
KX-002	65	140	17	19	
KX-003	75	118	14	19	7
KX-004	74	140	13	19	8
KX-005	68	155	17	19	8
KX-006	55	160	17	19	8
KX-007	70	155	17	19	8
KX-008	70	132	13	19	6.5
KX-009	50	140	13	19	7
KX-010	70	120	13	19	6.5
KX-011	34	130	17	19	6.5
KX-012	45	140	13		6
KX-013	74	120	13		6.5
KX-014	60	120	10	19	6.5
KX-015	60	140	13	19	8

更换钢圈

KANGXIN REPLACEMENT RIMS



KX replacement rims are preffered by professional chainsaw operators for their long wearlife and excellent performance. Saw chain is aligned perfectly with the bar groove using a floating rim that slides on a spline hub. The standard multiple for purchasing kangxin. Rims is in pakages of 10pcs



Instruction of Rim’s Part NO.

KX	325	7	X	7
BRAND	PITCH 375=3/8″ 325=.325″ 3759=3/8″ PL	TEETH COUNT	SPLINE SIZE M=MINI X=SMALL B=STANDARD	SPLINE TEETH

PART NUMBER	OREGON NUMBER	GB NUMBER	SPLINE	PITCH	TEETH
KX3757B7	68210	GBA7L7	STANDARD7	3/8″	7
KX404B7	22270	GBB7L7	STANDARD7	.404″	7
KX375X7	18720	GBA7S7	AMALL	3/8″	7
KX3257X7	11892	GBJ7S7	AMALL	.325″	7
Kx3257M7		GBJ7M7	MNI	.325″	7
KX3757M7		GBA7M7	MNI	3/8LP	7
KX3258X7	11891	GBJ8S7	SMALL	.325″	8
KX3258B7	22273	GBA8L7	STANDARD7	3/8″	8

Chain saw parts / Guide bars & Chains / Accessories

KX3757b7



KX2509X7



KX4047B7



KX3257X7



KX3758B7



KX3757X7



KX3257M7



KX3258X7



KX3757M7



包装展示 / PACKAGING DISPLAY



Packaging to show

Loop packaging
box (with 30smal | boxes)
25 x 20 x 20cm

Single packaging
small box with poly bag
15 x 8. 5 x 3. 5cm

Single packaging
blister plastic box
13 x 11. 5 x 2. 5cm

Chain saw parts / Guide bars & Chains / Accessories

备注：

联系方式：
sales@kxtchainsaw.com
Cheryl@kxtsawchain.com
harper@kxtsawchain.com
AllenShi@kxtsawchain.com
Emmy@kxtsawchain.com

康新工具